

PosiTector® 6000 Series

Coating Thickness Gages for ALL Metal Substrates



NEW! PosiTector App

Mobile app connects PosiTector Advanced instruments to your iOS or Android smart device.




Available on the App Store
 PosiTector® SmartLink Compatible
 Bluetooth

PosiTector® 6000 Series	Our most popular Removable Built-in and Cabled probe models		90° Regular duplex probe for coating light spot systems		Ideal for duplex anodized aluminum coatings		Microprobes – Our smallest probes for small parts or hard-to-reach areas		Removable Built-in and Cabled probes for thick protective coatings: epoxy, rubber, intumescent fireproofing and more													
	F1	F3	FXS1*	FXS3*	FRS1	FRS3	F0S1	F0S3	F4S1	F90S1	F90S3	FT1	FT3	FHX51**	FHX53**	NKS1	NKS3	FN51	FN53	FN551†	FN553†	
FERROUS PROBES	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance	Standard	Advance
NON-FERROUS PROBES	N1	N3	NRS1	NRS3	NRS1	NRS3	N0S1	N0S3	N4S1	N4S3	N90S1	N90S3	N0S1	N0S3	N4S1	N4S3	N90S1	N90S3				
COMBINATION PROBES	FN1	FN3	FNRS1	FNRS3	FNRS1	FNRS3	FNDS1^	FNDS3^														
Range	0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm		0–60mils 0–1500µm	
Accuracy*	±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils		±0.05 mil + 1% (0-2 mils) ±0.1 mil + 3% > 2 mils	
Matching Defelisko Calibration Standards	STD1		STD1		STD1		STD1		STD1		STD1		STD1		STD1		STD1		STD1		STD1	
	SDA1		SDA1		SDA1		SDA1		SDA1		SDA1		SDA1		SDA1		SDA1		SDA1		SDA1	
	STDS2		STDS2		STDS2		STDS2		STDS2		STDS2		STDS2		STDS2		STDS2		STDS2		STDS2	
	STDP1		STDP1		STDP1		STDP1		STDP1		STDP1		STDP1		STDP1		STDP1		STDP1		STDP1	
	STDP5		STDP5		STDP5		STDP5		STDP5		STDP5		STDP5		STDP5		STDP5		STDP5		STDP5	
	STDP7		STDP7		STDP7		STDP7		STDP7		STDP7		STDP7		STDP7		STDP7		STDP7		STDP7	
	STDP8		STDP8		STDP8		STDP8		STDP8		STDP8		STDP8		STDP8		STDP8		STDP8		STDP8	

Ferrous probes measure non-magnetic coatings on ferrous metals. Ferrous probes measure non-conductive coatings on non-ferrous metals. Ferrous probes measure non-conductive coatings on steel. Ideal for rough or hot surfaces up to 250°F (125°C). For full accuracy information see website. FNGS probes measure non-conductive coatings on all metal substrates as stated as a fixed value plus a percentage of the gage's actual reading.

Probe Details

(All probe details can be found online at www.defelisko.com/p6000/probes)

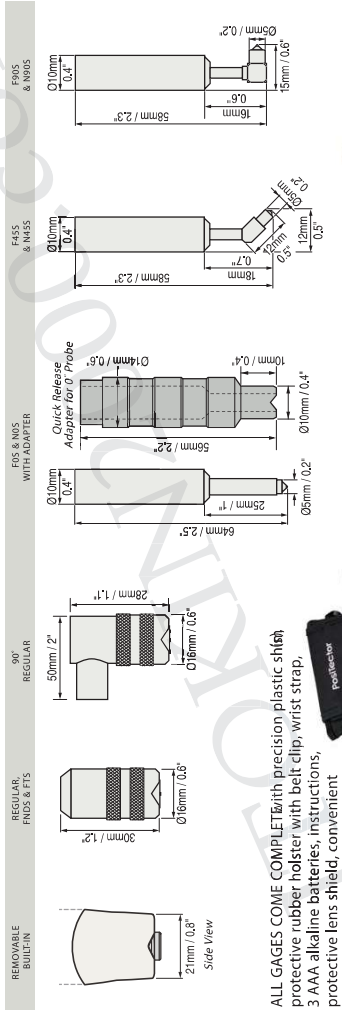

Options

Coating Thickness Standards to fulfill both ISO and In-house quality control requirements
 Extended cables for underwater or remote measuring.
 Specify length when ordering.



ALL GAGES COME COMPLETE with precision plastic shield protective rubber holster with belt clip, wrist strap, 3 AAA alkaline batteries, instructions, protective lens shield, convenient carrying case, Long Form Certificate of Calibration traceable to NIST or PTB, USB cable, PosiSoft Software, two(2) year warranty.

SIZE: 137 x 61 x 28 mm (5.4" x 2.4" x 1.1")
 WEIGHT: 140 g (4.9 oz) without batteries

Conforms to ISO 2178/2360/2808, ISO 19840, ASTM B499/D1186/ D1400/D7091/E376/G12, BS3900-C5, SSPC-PA2 and others

ITOHIN TECHNOLOGY CO., LTD.
 3/18 Soi 33, Vibhavadi Rangsit Road, 1-6 Separate Airport, Don Muang, Bangkok 10210 Thailand.
 (Monday – Friday 8.30–17.30) E-mail: sales@itokin.com / www.itokin2000.com