

# AC-3000


## Application

Used for checking the thickness coating of wet paint, enamel lacquer, adhesive, architectural coating, color coating, varnish, chemical industry, or other coating that has been applied to a smooth surface.

## Measuring Procedure

1. Select appropriate comb according to approximate known thickness.
2. Hold comb perpendicular to surface coating to be measured.
3. Press into coating until the comb stands square on substrate.
4. Wet film thickness is between the highest step which is coated and the next (higher) step which remains uncoated.

<b>Standard</b>	GB/T1764-79 GB/T134522-92 ISO2808-74
<b>Range</b>	25-3000um
<b>Value</b>	25, 50,75,100,125,150,175,200, 225,250,275,300,350,400,450, 500,550,600,650,700,750,800, 850,900,1000,1100,1200, 1400, 1600,1800,2000,2200,2400, 2600,2800,3000um

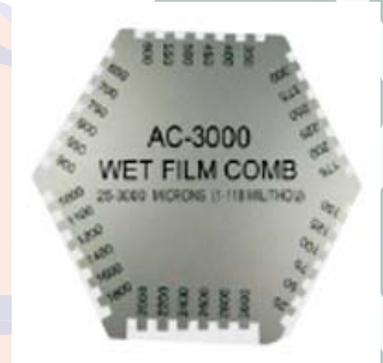

# CM-8000

CM-8000 Wet Film Comb Coating Thickness Tester Meter

## Features

**Measuring Range:** 5-118mil  
**Step Graduation :** 25um

## Measuring Procedure :

1. Select appropriate comb according to approximate known thickness.
2. Hold comb perpendicular to surface coating to be measured.
3. Press into coating until the comb stands square on substrate.
4. Wet film thickness is between the highest step which is coated and the next (higher) step which remains uncoated.

## Application:

Used for checking the thickness coating of wet paint, enamel lacquer, adhesive, architectural coating, color coating, varnish, chemical industry, or other coating that has been applied to a smooth surface.



\*สอบถามราคาได้ที่ 02-9744354-6 หรือสายด่วน 082-1288881, 081-7731860