
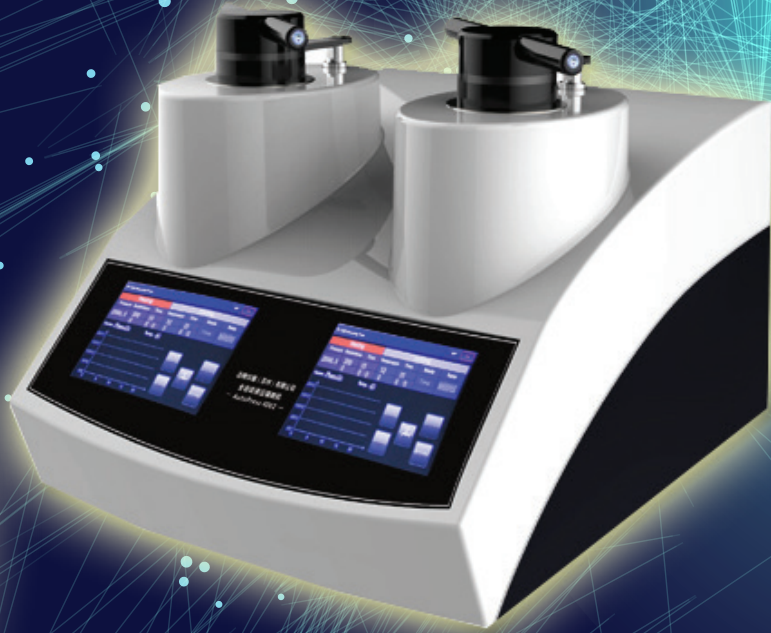


MODEL AUTOPRESS

SERIES

WWW.ITOKIN2000.COM

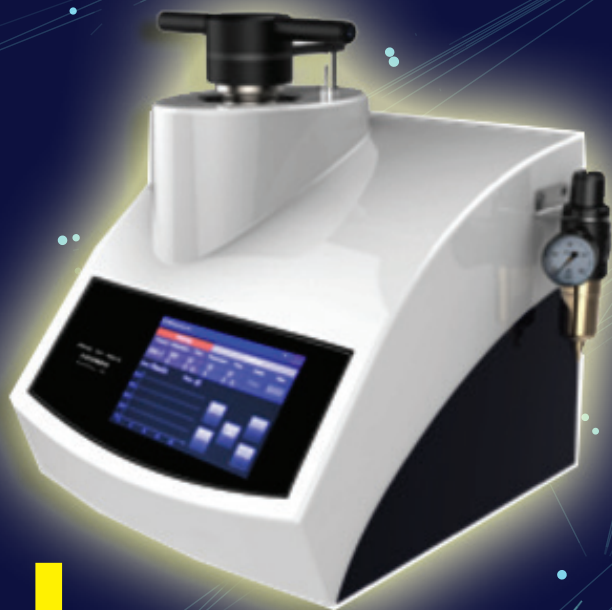

AUTOPRESS 4002

(2 KAM)

AUTOPRESS 501

AUTOPRESS 1201

AUTOPRESS 4001



www.itokin2000.com



itokintechnology.co.,LTD



Tel : 02-9744354-6



MODEL AUTOPRESS

SERIES

WWW.ITOKIN2000.COM



AUTOPRESS 501

AUTOPRESS 1201

AUTOPRESS 4001

FEATURES

- OPTIMIZED WARMING UP AND COOLING SYSTEM, ULTRASHORT MOUNTING TIME.
- ONE-KEY OPERATION, AUTOMATICALLY PROCESSING WARMING UP, PRESSING, THERMAL INSULATION, PRESSURE MAINTAINING, COOLING AND UNLOADING.
- OPERATION ON 7INCH COLOR TOUCH SCREEN, EASY-TO-EASY.
- BUILT-IN 20 GROUPS OF FREQUENTLY USED DATA, THE DATA CAN BE USERDEFINED.
- CHINESE AND ENGLISH INTERFACE, IT CAN BE SWITCHED FREELY.
- 4002 TWO SITE MODEL DESIGN, IT CAN PRESS DIFFERENT SIZE OF SAMPLES AT THE SAME TIME.
- MULTIPLE SAFETY PROTECTION.
- SMOOTH THERMOSTABILTY HIGH STRENGTH SHELL.

STANDARD DELIVERY

- BLACK MOSAIC POWER
- AIR WATER FILTER
- A FUNNEL
- WATER INLET/OUTLET
- RELEASE AGENT

OPTIONAL ACCESSORY

- GREEN MOSAIC POWER
- RED MOSAIC POWER
- ELECTRIC CONDUCTION MOSAIC POWER
- EDGE PRESERVING MOSAIC POWER
- TRANSPARENT MOSAIC POWER
- COOLING WATER TANK



www.itokin2000.com



itokintechnology.co.,LTD



Tel : 02-9744354-6



MODEL AUTOPRESS

SERIES

WWW.ITOKIN2000.COM

AUTOPRESS 501

AUTOPRESS 1201

AUTOPRESS 4001



SPECIFICATIONS

Model	AutoPress	AutoPress	AutoPress	AutoPress
	501	1201	4001	4002
Basic Parameter				
Operation mode	Auto	Auto	Auto	Auto
Station	1	1	1	2
Pressurization	Pneumatically	Hydraulic Pressure	Hydraulic Pressure	Hydraulic Pressure
Cooling Mode	Automatic Water Cooling			
Mould,mm	ø25 ●30 ø40 ø50 Other specifications can be customized			
Max Pressure (kgs)	500	1200	4000	4000
Highest Temperature, (°C)	180	200	200	200
Machine Power	1.2KW	1.2KW	1.5KW	3.0KW
Installation Conditions				
Electrical Supply	220V 50Hz	220V 50Hz	220V 50Hz	220V 50Hz
Air Supply	Must			
Cooling Water/Water Tank	Must			



www.itokin2000.com



itokintechnology.co.,LTD



Tel : 02-9744354-6



MODEL AUTOPRESS

SERIES

WWW.ITOKIN2000.COM



AUTOPRESS 4002

(2 KẠN)



FEATURES

- OPTIMIZED WARMING UP AND COOLING SYSTEM, ULTRASHORT MOUNTING TIME.
- ONE-KEY OPERATION, AUTOMATICALLY PROCESSING WARMING UP, PRESSING, THERMAL INSULATION, PRESSURE MAINTAINING, COOLING AND UNLOADING.
- OPERATION ON 7INCH COLOR TOUCH SCREEN, EASY-TO-EASY.
- BUILT-IN 20 GROUPS OF FREQUENTLY USED DATA, THE DATA CAN BE USERDEFINED.
- CHINESE AND ENGLISH INTERFACE, IT CAN BE SWITCHED FREELY.
- 4002 TWO SITE MODEL DESIGN, IT CAN PRESS DIFFERENT SIZE OF SAMPLES AT THE SAME TIME.
- MULTIPLE SAFETY PROTECTION.
- SMOOTH THERMOSTABILTY HIGH STRENGTH SHELL.

STANDARD DELIVERY

- BLACK MOSAIC POWER
- AIR WATER FILTER
- A FUNNEL
- WATER INLET/OUTLET
- RELEASE AGENT

OPTIONAL ACCESSORY

- GREEN MOSAIC POWER
- RED MOSAIC POWER
- ELECTRIC CONDUCTION MOSAIC POWER
- EDGE PRESERVING MOSAIC POWER
- TRANSPARENT MOSAIC POWER
- COOLING WATER TANK



www.itokin2000.com



itokintechnology.co.,LTD



Tel : 02-9744354-6




MODEL AUTOPRESS

SERIES

WWW.ITOKIN2000.COM

AUTOPRESS 4002

(2 KAN)

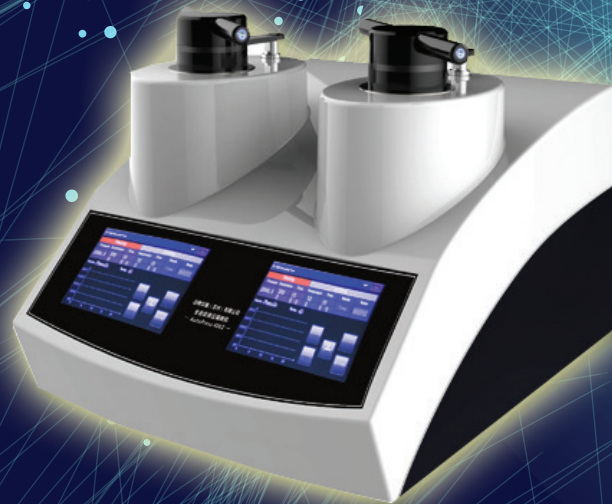

SPECIFICATIONS

Model	AutoPress	AutoPress	AutoPress	AutoPress
	501	1201	4001	4002
Basic Parameter				
Operation mode	Auto	Auto	Auto	Auto
Station	1	1	1	2
Pressurization	Pneumatically	Hydraulic Pressure	Hydraulic Pressure	Hydraulic Pressure
Cooling Mode	Automatic Water Cooling			
Mould,mm	ø25 ●30 ø40 ø50 Other specifications can be customized			
Max Pressure (kgs)	500	1200	4000	4000
Highest Temperature, (°C)	180	200	200	200
Machine Power	1.2KW	1.2KW	1.5KW	3.0KW
Installation Conditions				
Electrical Supply	220V 50Hz	220V 50Hz	220V 50Hz	220V 50Hz
Air Supply	Must			
Cooling Water/Water Tank	Must			



www.itokin2000.com



itokintechnology.co.,LTD



Tel : 02-9744354-6

