




# Durometer

**MADE IN JAPAN**

[www.itokin2000.com](http://www.itokin2000.com)

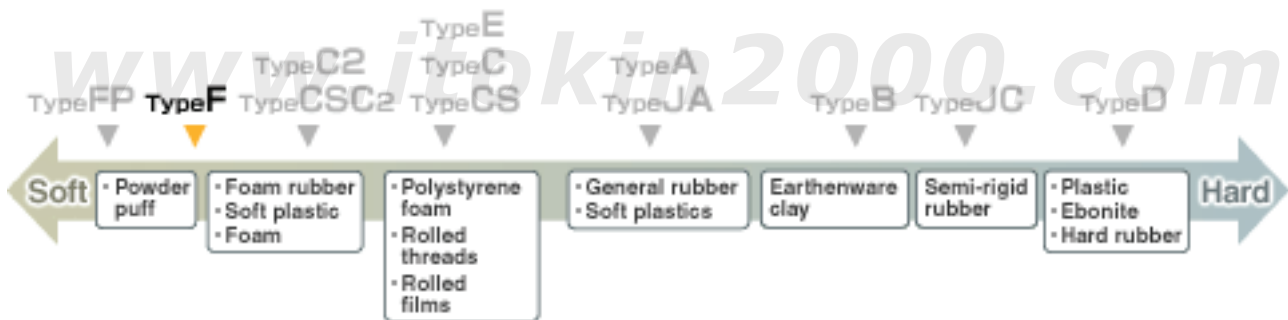

## Durometer Asker Specifications

**Indication Range :** 262 degree dial scale

**Minimum indication :** 1 point ( Accuracy : + - 1 Point )

**Pressure foot Dimensions :** 44 x 18 mm Rectangular

**Outer Dimensions :** Approx. Width 57 x Depth 30 x Height 76 mm

**Mounting Thread :** M6 P1

**Weight :** 200 Grams

Standard Model	L Model	Scale	Application	Standard
X-F	-	Asker F	Urethane foam, non-woven fabric	Asker F
X-C2*	X-C2L*	Asker C2	Soft rubber & sponge	Asker C2
X-E*	X-EL*	Asker E	Soft & cellular rubber	JIS K 6253
X-C	X-C1L*	Asker C	Soft rubber, sponge , textile windings	JIS K 7312/Asker C
X-CS*	-	Asker CS	Polytrene foam	Asker CS
X-A	X-AL*	Shore A	Normal rubber & Softer plastics	ASTM D 2240
X-JA*	X-JAL*	Asker JA	Normal & Softer plastics	JIS K 6301
X-B*	X-BL*	Asker B	Semi rigid rubber & plastics	ASTM D 2240
X-D	X-DL*	Shore D	Hard rubber & Plastics	ASTM D 224

**02-9744354-6**

[www.itokin2000.com](http://www.itokin2000.com)

[channal/itokin2000.com](https://www.youtube.com/channel/itokin2000.com)

[itokintechnology](https://www.facebook.com/itokintechnology)

[Line @itokin2000.com](https://www.line.me/@itokin2000.com)